

CAS 741, CES 741 (Development of Scientific Computing Software)

Fall 2020

09 Verification and Validation

Dr. Spencer Smith

Faculty of Engineering, McMaster University

December 16, 2020



Verification and Validation

- Start recording
- Administrative details
- Questions?
- 741 workflow
- Testing from SE perspective
- Testing from SC perspective
- V&V template
- V&V examples
 - ▶ SWHS
 - ▶ Mesh Gen
 - ▶ Rogue Reborn

Administrative Details

- SRS Presentation grades on Avenue
- VnV docs in Blank Project Template consolidated
- Create GitHub issues for your colleagues (details on next slide)
- Go ahead and address the colleague created issues
- Reading week next week, no 741 classes, work on VnV

GitHub Reviews

- Project owners
 - ▶ Find your reviewers in [Repos.xlsx](#)
 - ▶ Add your reviewers as collaborators
 - ▶ Assign review issues to myself and your reviewers
 - ▶ **separate** issue for each reviewer
- Reviewers
 - ▶ Provide at least 4 issues on the document
 - ▶ Grading
 - ▶ Not enough issues, or poor issues 0/2
 - ▶ Enough issues, but shallow 1/2
 - ▶ Enough issues and deep (not surface) 2/2
 - ▶ Issues are due 2 days after being assigned
- Follow normal GitHub conventions (see [Writing Checklist](#))

Administrative Details: Drasil

- For some students, the SRS will be translated to Drasil
 - ▶ Due in place of design documentation
 - ▶ [Forking Drasil](#)
 - ▶ [Creating a Project in Drasil](#)
 - ▶ If you have questions on creating a project, start by assigning an issue (at-ing) Olu (oluowoj)

Administrative Details: VnV Presentations

- Not everyone will do VnV presentations
- Select 1 or 2 of the following:
 - ▶ **Specific** functional system test cases
 - ▶ **Specific** nonfunctional system test cases, such as
 - ▶ Performance profile
 - ▶ Usability testing
 - ▶ SRS verification plan
 - ▶ Automated testing and verification tools
 - ▶ Profiling tools
 - ▶ Continuous integration
 - ▶ Code coverage
 - ▶ Linters
 - ▶ Other related topic, etc.
- We would like a variety of topics presented
- If you are uncertain of your specific presentation plan, please ask

Administrative Details: Report Deadlines

SRS	Oct 8
System VnV Plan	Oct 29
MG + MIS (Traditional)	Nov 19
Drasil Code and Report (Drasil)	Nov 19
Final Documentation	Dec 9

- The written deliverables will be graded based on the repo contents as of 11:59 pm of the due date
- If you need an extension for a written deliverable, please ask
- You should inform your primary and secondary reviewers of the extension
- Two days after each major deliverable, your GitHub issues will be due

Admin Details: Presentation Schedule

- Syst V&V Plan Present (15 min)
 - ▶ Thurs, Oct 22: Ting-Yu, Mohamed, Naveen, Liz, Salah
- Proof of Concept Demonstrations (15 min)
 - ▶ Mon, Oct 26: Tiago, Mohamed, Xuanming, Parsa, Gaby
 - ▶ Mon, Nov 2: Sid, Shayan, Leila, Xingzhi, Liz
 - ▶ Thurs, Nov 12: Salah, John
- MG Present (10 minutes)
 - ▶ Thurs, Nov 12: John, Tiago, Leila, Xuanming, Andrea
- MIS Present
 - ▶ Mon, Nov 16: Shayan, Parsa, Gaby, Sid, Xingzhi
- Drasil Project Present (20 min each)
 - ▶ Thurs, Nov 26: Andrea, Naveen, Ting-Yu


Presentation Schedule Continued

- Test or Impl. Present (15 min each)
 - ▶ Mon, Nov 30: John, Salah, Liz, Xingzhi, Leila
 - ▶ Thurs, Dec 3: Shayan, Naveen, Sid, Gaby, Seyed
 - ▶ Mon, Dec 7: Ting-Yu, Xuanming, Mohamed, Andrea, Tiago
- 4 presentations each
- If you will miss a presentation, please trade with someone else

Questions?

- Questions about SRS?

“Faked” Rational Design Process

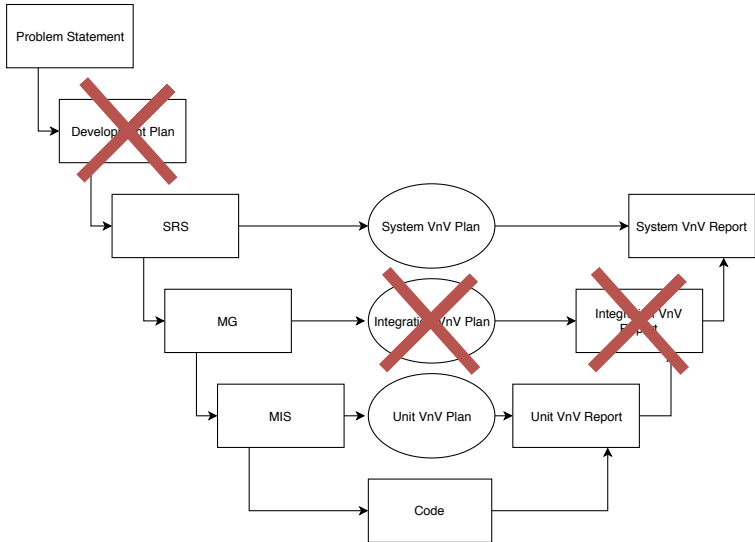

Verification Plan Needs to Be Specific

- State exactly what your test cases are, give the actual input, and expected output
- State feasible plans for testing and inspection
- Decide what to emphasize, could include performance testing, or usability testing
- Part of the grading will be feedback on whether your VnV plan is an A+ effort, or not
- Give specific measures of error/performance/....
- How do you quantify error for a single scalar value?
- How do you quantify error for a vector value?

Outline of Verification Topics

- What are the goals of verification?
- What are the main approaches to verification?
 - ▶ What kind of assurance do we get through testing?
 - ▶ Can testing prove correctness?
 - ▶ How can testing be done systematically?
 - ▶ How can we remove defects (debugging)?
- What are the main approaches to software analysis?
- Informal versus formal analysis

Incorrect Version of Delete

Using `s = new T[MAX_SIZE]`, for some type `T`

```
public static void del(int i)
{
    int j;

    for (j = i; j <= (length - 1); j++)
    {
        s[j] = s[j+1];
    }

    length = length - 1;
}
```

- What is the error?
- What test case would highlight the error?

Correct Version of Delete

```
public static void del(int i)
{
    int j;

    for (j = i; j < (length - 1); j++)
    {
        s[j] = s[j+1];
    }

    length = length - 1;
}
```

Avoids potential `ArrayIndexOutOfBoundsException` Exception


Verification Versus Validation

- What is the difference between verification and validation?

Verification Versus Validation

- Verification - Are we building the product right? Are we implementing the requirements correctly (internal)
- Validation - Are we building the right product? Are we getting the right requirements (external)
- According to [Capability Maturity Model \(CMM\)](#)
 - ▶ Software Verification: The process of evaluating software to determine whether the products of a given development phase satisfy the conditions imposed at the start of that phase. [IEEE-STD-610]
 - ▶ Software Validation: The process of evaluating software during or at the end of the development process to determine whether it satisfies specified requirements. [IEEE-STD-610]
- We will focus on verification

Verification Activities

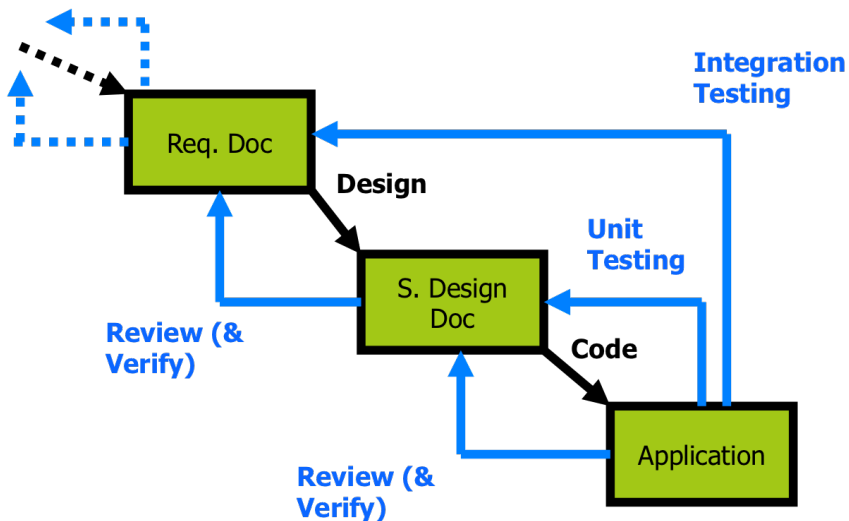

Testing Phases

1. Unit testing
2. Integration testing
3. System testing
4. Acceptance testing

Need for Verification

- Designers are fallible even if they are skilled and follow sound principles
- We need to build confidence in the software
- Everything must be verified, every required functionality, every required quality, every process, every product, every document
- For every work product covered in this class we have discussed its verification
- Even verification itself must be verified

Properties of Verification

From [?]

- May not be binary (OK, not OK)
 - ▶ Severity of defect is important
 - ▶ Some defects may be tolerated
 - ▶ Our goal is typically acceptable reliability, not correctness
- May be subjective or objective - for instance, usability, generic level of maintainability or portability
 - ▶ How might we make usability objective?
- Even implicit qualities should be verified
 - ▶ Because requirements are often incomplete
 - ▶ For instance robustness, maintainability
- What is better than implicitly specified qualities?

Approaches to Verification

- What are some approaches to verification?
- How can we categorize these approaches?

Approaches to Verification

- Experiment with behaviour of product
 - ▶ Sample behaviours via testing
 - ▶ Goal is to find “counter examples”
 - ▶ **Dynamic** technique
 - ▶ Examples: unit testing, integration testing, acceptance testing, white box testing, stress testing, etc.
- Analyze product to deduce its adequacy
 - ▶ Analytic study of properties
 - ▶ **Static** technique
 - ▶ Examples: Code walk-throughs, code inspections, correctness proof, etc.

Does our Engineering Analogy Fail?

- If a bridge can hold 512 kN, can it hold 499 kN?
- If our software works for the input 512, will it work for 499?

Verification in Engineering

- Example of bridge design
- One test assures infinite correct situations
- In software a small change in the input may result in significantly different behaviour
- There are also chaotic systems in nature, but products of engineering design are usually stable and well-behaved

Modified Version Works for 512, but not 499

```
procedure binary-search (key: in element;  
                        table: in elementTable; found: out Boolean) is  
begin  
  bottom := table'first; top := table'last;  
  while bottom < top loop  
    if (bottom + top) rem 2  $\neq$  0 then  
      middle := (bottom + top - 1) / 2;  
    else  
      middle := (bottom + top) / 2;  
    end if;  
    if key  $\leq$  table (middle) then  
      top := middle;  
    else  
      bottom := middle + 1;  
    end if;  
  end loop;  
  found := key = table (top);  
end binary-search
```

if we omit this
the routine
works if the else
is never hit!
(i.e. if size of table
is a power of 2)



Testing and Lack of “Continuity”

- Testing samples behaviours by examining “test cases”
- Impossible to extrapolate behaviour of software from a finite set of test cases
- No continuity of behaviour - it can exhibit correct behaviour in infinitely many cases, but may still be incorrect in some cases

Goals of Testing

- If our code passes all test cases, is it now guaranteed to be error free?
- Are 5000 random tests always better than 5 carefully selected tests?

Goals of Testing

- To show the **presence** of bugs (Dijkstra, 1972)
- If tests do not detect failures, we cannot conclude that software is defect-free
- Still, we need to do testing - driven by sound and systematic principles
 - ▶ Random testing is often not a systematic principle to use
 - ▶ Need a test plan
- Should help isolate errors - to facilitate debugging

Goals of Testing Continued

- Should be repeatable
 - ▶ Repeating the same experiment, we should get the same results
 - ▶ Repeatability may not be true because of the effect of the execution environment on testing
 - ▶ Repeatability may not occur if there are uninitialized variables
 - ▶ Repeatability may not happen when there is nondeterminism
- Should be accurate
 - ▶ Accuracy increases reliability
 - ▶ Part of the motivation for formal specification
- Is a successful test case one that passes the test, or one that shows a failure?

Test (V&V) Plan

- Given that no single verification technique can prove correctness, the practical approach is to use ALL verification techniques. Is this statement True or False?

Test (V&V) Plan

- Testing can uncover errors and build confidence in the software
- Resources of time, people, facilities are limited
- Need to plan how the software will be tested
- You know in advance that the software is unlikely to be perfect
- You need to put resources into the most important parts of the project
- A risk analysis can determine where to put your limited resources
- A risk is a condition that can result in a loss
- Risk analysis involves looking at how bad the loss can be and at the probability of the loss occurring

White Box Versus Black Box Testing

- Do you know (or can you guess) the difference between white box and black box testing?
- What if they were labelled transparent box and opaque box testing, respectively?

White Box Versus Black Box Testing

- White box testing is derived from the program's internal structure
- Black box testing is derived from a description of the program's function
- Should perform both white box and black box testing
- Black box testing
 - ▶ Uncovers errors that occur in implementing requirements or design specifications
 - ▶ Not concerned with how processing occurs, but with the results
 - ▶ Focuses on functional requirements for the system
 - ▶ Focuses on normal behaviour of the system

White Box Testing

- Uncovers errors that occur during implementation of the program
- Concerned with how processing occurs
- Evaluates whether the structure is sound
- Focuses on abnormal or extreme behaviour of the system

Dynamic Testing

- Is there a dynamic testing technique that can guarantee correctness?
- If so, what is the technique?
- Is this technique practical?

Dynamic Versus Static Testing

- Another classification of verification techniques, as previously discussed
- Use a combination of dynamic and static testing
- Dynamic analysis
 - ▶ Requires the program to be executed
 - ▶ Test cases are run and results are checked against expected behaviour
 - ▶ Exhaustive testing is the only dynamic technique that guarantees program validity
 - ▶ Exhaustive testing is usually impractical or impossible
 - ▶ Reduce number of test cases by finding criteria for choosing representative test cases

Static Testing Continued

- Static analysis
 - ▶ Does not involve program execution
 - ▶ Testing techniques simulate the dynamic environment
 - ▶ Includes syntax checking
 - ▶ Generally static testing is used in the requirements and design stage, where there is no code to execute
 - ▶ Document and code walkthroughs
 - ▶ Document and code inspections

Manual Versus Automated Testing

- What is the difference between manual and automated testing?
- What are the advantages of automated testing?
- What is regression testing?

Manual Versus Automated Testing

- Manual testing
 - ▶ Has to be conducted by people
 - ▶ Includes by-hand test cases, structured walkthroughs, code inspections
- Automated testing
 - ▶ The more automated the development process, the easier to automate testing
 - ▶ Less reliance on people
 - ▶ Necessary for regression testing
 - ▶ Test tools can assist, such as Junit, Cppunit, CuTest etc.
 - ▶ Can be challenging to automate GUI tests
 - ▶ Test suite for Maple has 2 000 000 test cases, run on 14 platforms, every night, automated reporting

Continuous Integration Testing

- What is continuous integration testing?

Continuous Integration Testing

- Information available on [Wikipedia](#)
- Developers integrate their code into a shared repo frequently (multiple times a day)
- Each integration is automatically accompanied by regression tests and other build tasks
- Build server
 - ▶ Unit tests
 - ▶ Integration tests
 - ▶ Static analysis
 - ▶ Profile performance
 - ▶ Extract documentation
 - ▶ Update project web-page
 - ▶ Portability tests
 - ▶ etc.
- Avoids potentially extreme problems with integration when the baseline and a developer's code greatly differ

Continuous Integration Tools

- Gitlab
 - ▶ Example at [Rogue Reborn](#)
- Jenkins
- Travis
- Docker
 - ▶ Eliminates the “it works on my machine” problem
 - ▶ Package dependencies with your apps
 - ▶ A container for lightweight virtualization
 - ▶ Not a full VM

Sample Nonfunctional System Testing

- Stress testing - Determines if the system can function when subject to large volumes
- Usability testing
- Performance measurement

Sample Functional System Testing

- Requirements: Determines if the system can perform its function correctly and that the correctness can be sustained over a continuous period of time
- Error Handling: Determines the ability of the system to properly process incorrect transactions
- Manual Support: Determines that the manual support procedures are documented and complete, where manual support involves procedures, interfaces between people and the system, and training procedures
- Parallel: Determines the results of the new application are consistent with the processing of the previous application or version of the application

Theoretical Foundations Of Testing: Definitions

- P (program), D (input domain), R (output domain)
 - ▶ $P: D \rightarrow R$ (may be partial)
- Correctness defined by $OR \subseteq D \times R$
 - ▶ $P(d)$ correct if $\langle d, P(d) \rangle \in OR$
 - ▶ P correct if all $P(d)$ are correct
- Failure
 - ▶ $P(d)$ is not correct
 - ▶ May be undefined (error state) or may be the wrong result
- Error (Defect)
 - ▶ Anything that may cause a failure
 - ▶ Typing mistake
 - ▶ Programmer forgot to test “ $x=0$ ”
- Fault
 - ▶ Incorrect intermediate state entered by program

Definitions Questions

- A test case t is an element of D or R ?
- A test set T is a finite subset of D or R ?
- How would we define whether a test is successful?
- How would we define whether a test set is successful?

Definitions Continued

- Test case t : An element of D
- Test set T : A finite subset of D
- Test is successful if $P(t)$ is correct
- Test set successful if P correct for all t in T

Theoretical Foundations of Testing

- Desire a test set T that is a finite subset of D that will uncover all errors
- Determining an ideal T leads to several **undecidable problems**
- No algorithm exists:
 - ▶ To state if a test set will uncover all possible errors
 - ▶ To derive a test set that would prove program correctness
 - ▶ To determine whether suitable input exists to guarantee execution of a given statement in a given program
 - ▶ etc.


Empirical Testing

- Need to introduce empirical testing principles and heuristics as a compromise between the impossible and the inadequate
- Find a strategy to select **significant** test cases
- Significant means the test cases have a high potential of uncovering the presence of errors

Complete-Coverage Principle

- Try to group elements of D into subdomains D_1, D_2, \dots, D_n where any element of each D_i is likely to have similar behaviour
- $D = D_1 \cup D_2 \cup \dots \cup D_n$
- Select one test as a representative of the subdomain
- If $D_j \cap D_k = \emptyset$ for all $j \neq k$, (partition), any element can be chosen from each subdomain
- Otherwise choose representatives to minimize number of tests, yet fulfilling the principle

Complete-Coverage Principle

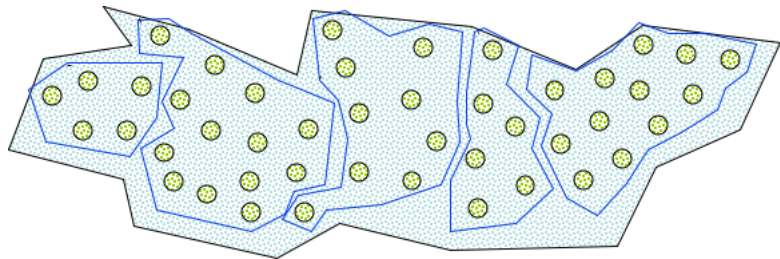

References I